



#67500 - #67530K TORQIT TORQUE GUN

#67500 - #67530K TORQIT High-Precision Torque Gun

- Durable and Portable Precision Torque
- Four Models From 120 Ft/Lbs to 3,000 ft/lbs
- Accuracy of +/- 5%
- Lithium Ion 8.0 Ah Rechargeable Battery
- Every Unit Calibrated In ISO17025 Laboratory
- 13-Month Warranty from date of purchase
- Made in the USA

TorqIT
HIGH-PRECISION TORQUE



BATTERY-POWERED
FULL CHARGE
IN 60 MINS



BATTERY



CHARGING
KIT




**WIRELESS,
LIGHTWEIGHT
PRECISION TORQUE**

Durable
carrying case
included



Model	Description	Min Torque	Max Torque	Square Drive	Weight
67505	Wrench only	120 ft./lbs.	500 ft./lbs.	3/4"	8.3 lbs (3.8 kg)
67505K	Wrench and battery kit	120 ft./lbs.	500 ft./lbs.	3/4"	10.4 lbs (4.7 kg)
67510	Wrench only	240 ft./lbs.	1000 ft./lbs.	1"	11.5 lbs (5.2 kg)
67510K	Wrench and battery kit	240 ft./lbs.	1000 ft./lbs.	1"	14.5 lbs (6.6 kg)
67520	Wrench only	500 ft./lbs.	2000 ft./lbs.	1"	13.1 lbs (5.9 kg)
67520K	Wrench and battery kit	500 ft./lbs.	2000 ft./lbs.	1"	15.9 lbs (7.2 kg)
67530	Wrench only	750 ft./lbs.	3000 ft./lbs.	1"	19.6 lbs (8.9 kg)
67530K	Wrench and battery kit	750 ft./lbs.	3000 ft./lbs.	1"	22.5 lbs (10.2 kg)
67500	Battery pack	-	-	-	1 lbs (0.45 kg)

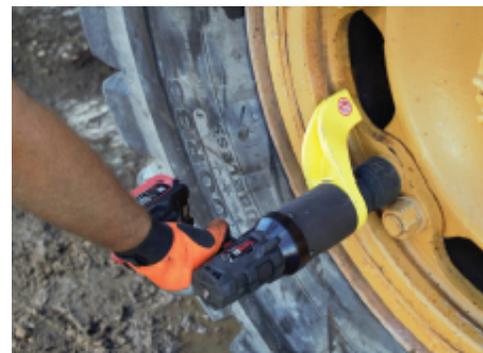


2347 Circuit Way
Brooksville, FL 34604
352.799.1111 - sales@ameintl.net





#67500 - #67530K TORQIT TORQUE WRENCHES

LONG EXTENDED REACTION ARM



SOCKET-TO-SOCKET REACTION ARM



STRAIGHT REACTION ARM



SLIDING STRAIGHT REACTION ARM



NOSE EXTENSIONS



**67512-E6 Gun and 6" Extension sold as one complete unit.



(F G H)**

	1" DRIVE MODEL NO.	3/4" DRIVE MODEL NO.	DESCRIPTION
A	67512	67525	Long Arm for use w/ Deep Well Sockets
B	67518	67585	Socket to Socket Reaction Arm
C	67513	67535	Straight Reaction Arm
D	67514	67545	Sliding Straight Reaction Arm
E	67510-E6	-	67510 1" Drive w/ 6" Nose Extension
F	67516	67565	6" Nose Extension Only**
G	67517	67575	12" Nose Extension Only**
H	67519	-	18" Nose Extension Only**

*SOLD SEPARATELY

#67505
single speed
Torque range
120-500 FT/LBS
Free speed
12-20 RPM

#67510
single speed
Torque range
240-1000 FT/LBS
Free Speed
2-8 RPM

#67520
single speed
Torque range
500-2000 FT/LBS
Free speed
1-5 RPM

#67530
single speed
Torque range
750-3000 FT/LBS
Free speed
0.5-2 RPM

Charger Requirements: 110 - 120 V (50-60 Hz) and 230 - 240 V (50-60 Hz)

2347 Circuit Way
Brooksville, FL 34604
352.799.1111 - sales@ameintl.net

